
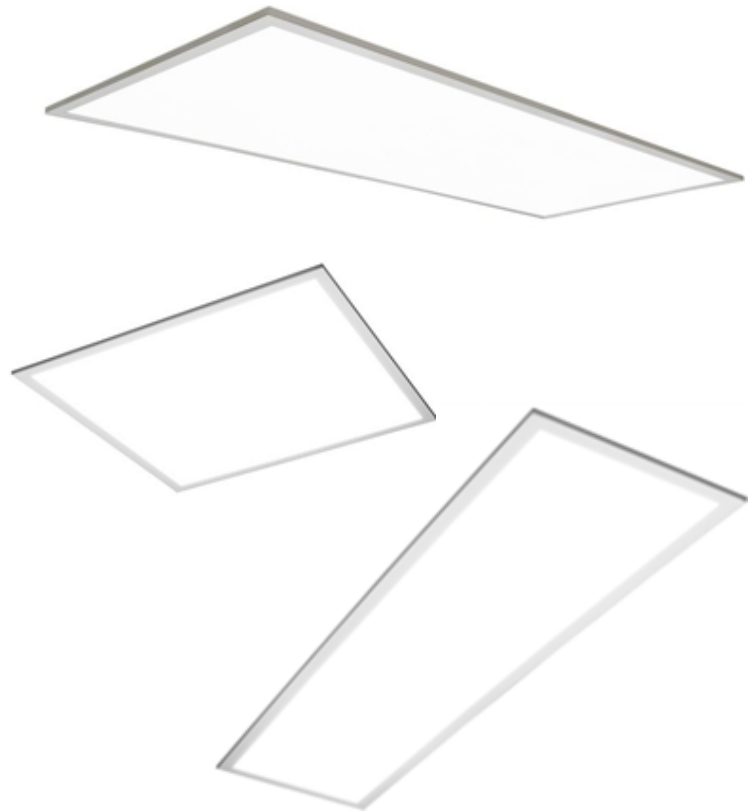
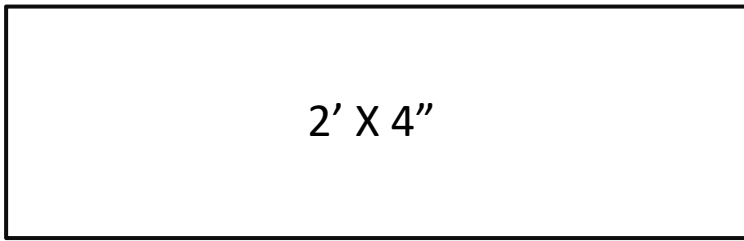
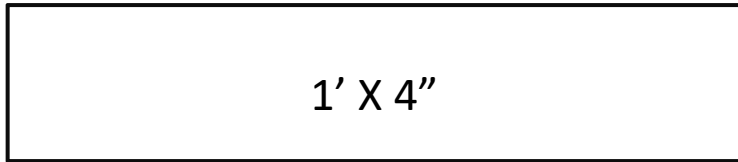


PROJECT:
TYPE:

## LED Flat Panels 2X2, 2X4, & 1X4

Our LED Flat Panels provide totally uniform, smooth and visually comfortable lighting with low glare and shadows that invigorate otherwise uninspired areas with crisp light. Ideal for a many spaces and applications these LED Flat Panels allow the lighting designer to illuminate a wide range of areas without compromising on design. This simple and classic design will stand the test of time.



### ORDERING INFORMATION

Model	Watts	Lumen	PoE Dimmable	Color Temp	CRI	Finish	Optional
LI-CFP22-WH	1 - 25W	1 - 3250lm	1 - Yes	1 - 3000K	1 - >80	1 - WH	1 - Surface mount kit
LI-CFP24-WH	2 - 50W	2 - 6500lm		2 - 3500K			
LI-CFP14-WH	3 - 15W	3 - 2100lm		3 - 4000K			
				4 - 5000K			

#### Features:

- Mercury free
- 3 Years warranty
- Fits standard 1" and 9/16" T-bar grid ceilings.
- Ideal for: Offices, Retail Stores, Schools, Hospitality, Restaurants, Healthcare

#### Electrical:


- **Input Voltage:** PoE Compatible
- **Wattage:** 1x4 = 15W, 2x2 = 25W, 2x4 = 25W,50W
- **Lumens (L):** 1x4 = 2100 lm, 2x2 = 3250 lm, 2x4 = 6500 lm
- **Rated Life:** 50,000 hours
- **Controls:** 0-10V dimming with PoE driver
- **Damp location rated:** IP20



POWERED BY LED INDUSTRIES


PROJECT:
TYPE:

# LED Flat Panels 2X2, 2X4, & 1X4

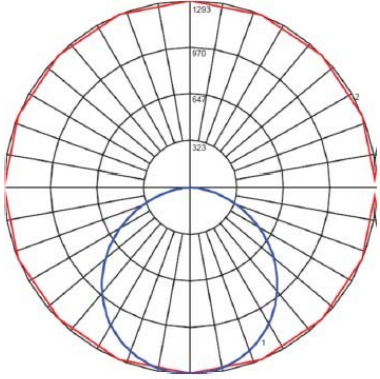


2x2

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4412	4513	4581
55	4251	4376	4450
65	3986	4136	4196
75	3419	3623	3671
85	2294	2610	2618

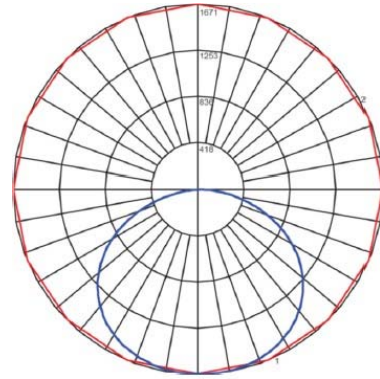

2x4

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6675	6374	5773
55	6442	6200	5563
65	6001	5775	5155
75	5091	4888	4329
85	3113	3077	2764

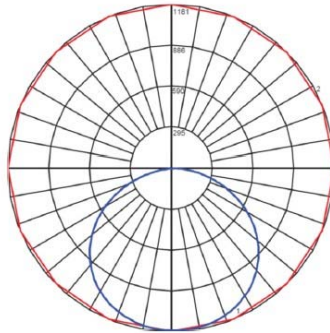

1x4

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4527	4319	3862
55	4346	4165	3702
65	3992	3813	3434
75	3284	3098	2942
85	1765	1634	2081

