


PROJECT:
TYPE:

Recessed Wall Lighting

Description

Recessed wall luminaire with unshielded light distribution. The luminaire has a directing and guiding light effect. The luminance level on the lit surface is lower, but the ambient brightness is greater with increased vertical illuminance.

- **SPECIFICATIONS:**
 - **Material:**
 - Aluminum Alloy
 - **Dimensions:**
 - 7 1/2" x 4 7/8"
- **ELECTRICAL:**
 - **Input Voltage:**
 - PoE
 - **Wattage (W):** 3W
 - **Lumens (L)/Watt (W):** 100 l/w
 - **Light Source:** LED
 - **IP:** IP65
 - **Controls:** Dimming with PoE Driver.
- **LABELS:**
 - ETL conforms to UL STD 1598; Certified to CAN/CSA STD C22.2
 - LED light assembly conforms to UL 2108 for remote installation.
 - RoHS compliant
- **WARRANTY:**
 - 5-Year Limited Warranty

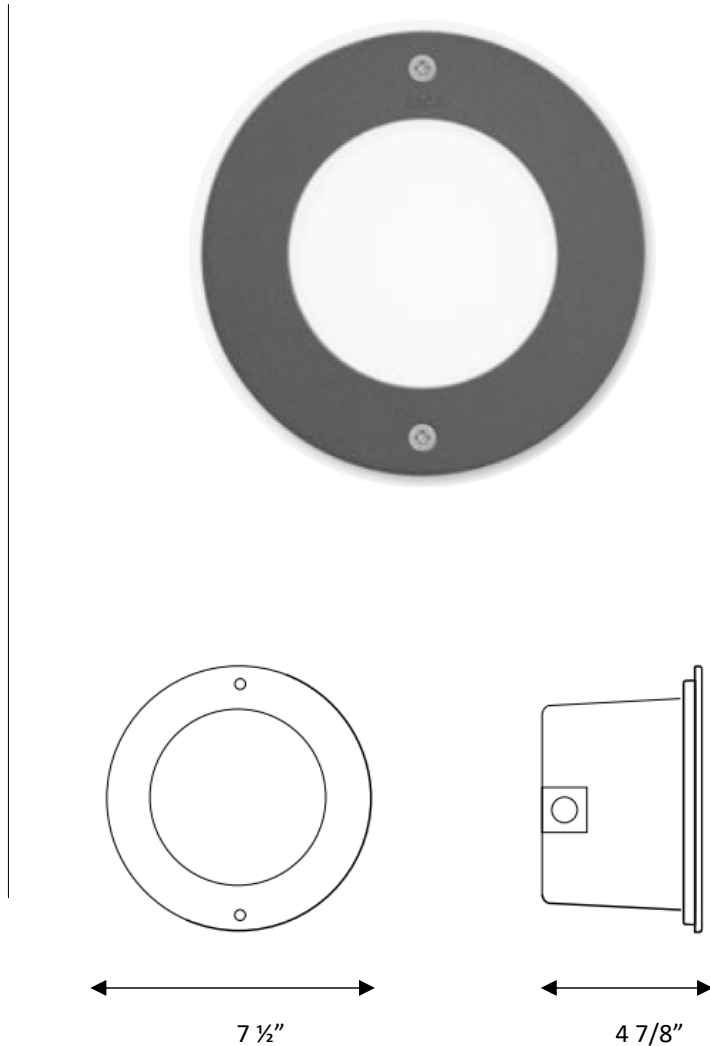

ORDERING INFORMATION

Ordering Example: LI-ERL-3-30-80-40-BL

Model	Watts	Nominal Lumens	CRI	Color Temp	Voltage	Dimmable	Finishes
LI-ERL	3W	300lm	>80	40 - 4000K	1-PoE Node	PD-PoE Dimmable	Black White Silver Bronze