

# Recessed Wall Lighting

## Description

LED recessed wall luminaire with asymmetrical light distribution for the illumination of ground surfaces, building entrances, stairs and footpaths.

### SPECIFICATIONS:

#### Material:

- Aluminum

#### Dimensions:

- L x W x H: 3.54" x 9.8" x 3.86"

### ELECTRICAL:

#### Input Voltage:

- PoE

#### Wattage (W): 12W

#### Lumens (L)/Watt (W): 100l/w

#### Light Source: Integrated LED

#### IP: IP65

#### Controls: Dimming with Poe Driver.

### LABELS:


- ETL conforms to UL STD 1598; Certified to CAN/CSA STD C22.2

- LED light assembly conforms to UL 2108 for remote installation.

- RoHS compliant

### WARRANTY:

- 5-Year Limited Warranty

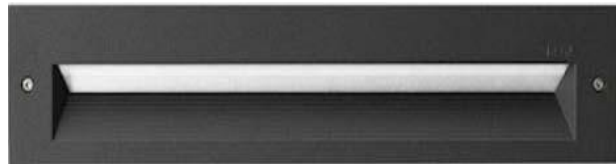


Fully enclosed luminaire with installation housing ensures seamless integration and weathertight operation.



POWERED BY LED INDUSTRIES

# Recessed Wall Lighting

## DIMENSIONS:

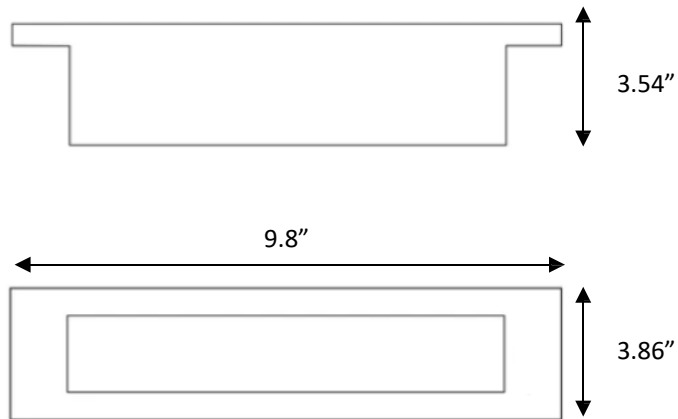

## ORDERING INFORMATION

Ordering Example: LI-YJ13305-12-30-BL

Model	Watts	Nominal Lumens	CRI	Color Temp	Voltage	Dimmable	Finishes
LI-YJ13305	12W	1200lm	>80	30 - 3000K 35 - 3500K 40 - 4000K	1-PoE Node	PD-PoE Dimmable	Black White Silver Bronze