

PROJECT:	
TYPE:	









## **Description:**

The Wicker Pendant Light transmits a feeling of simplicity, softness, and a touch of magic in a contemporary style. It is formed from fiberglass soaked in epoxy resin that is randomly coiled around an inflatable mold, creating a magic translucent 3D fabric. The shade is a unified piece with a small opening at the top for access to the lamp. The bulb provides ambient, illumination that is ideal for but not limited to illuminating foyers, living rooms, bedrooms, dining rooms, and lounges.

#### SPECFICATIONS:

Material:

 Metal & Epoxy-Coated Fiberglass

Dimensions: Dia. X H

• Small: 19.7" X 19.7"

**Medium:** 31.5" X

31.5"

Large: 41.3" X 41.3"

#### ELECTRICAL:

Input Voltage:

PoE

Wattage (W):

Min.: 5W Max.: 10W

LED Lumen/Watt: 100

LM/W

Light Source: 1 X E26 Lamp

Lamps not Included

IP Rating: IP 20

Controls: Dimming with PoE

Driver.

#### LABELS:

 ETL conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0

 LED light assembly conforms to UL 2108 for remote installation.

RoHS compliant

#### WARRANTY:

5-Year Limited Warranty







## **Nominal Dimensions:**

### Small:

Diameter 19.75", 2.6 lbs.



19.75"

Cord: L 157.48" Fixture: H 19.7" X

Dia. 19.7"

Maximum Hanging: L Adj To 177.18"

#### Medium:

Diameter 31.5", 4 lbs.



31.5"


Cord: L 157.48 in" Fixture: H 31.5" X

Dia. 31.5"

Maximum Hanging: L Adj To 188.98"

## Large:

Diameter 41.5", 5.5 lbs.



Cord: L 157.48" Fixture: H 41.3" X

Dia. 41.3"


Maximum Hanging: L Adj To 198.78 in







## **Canopy Types:**

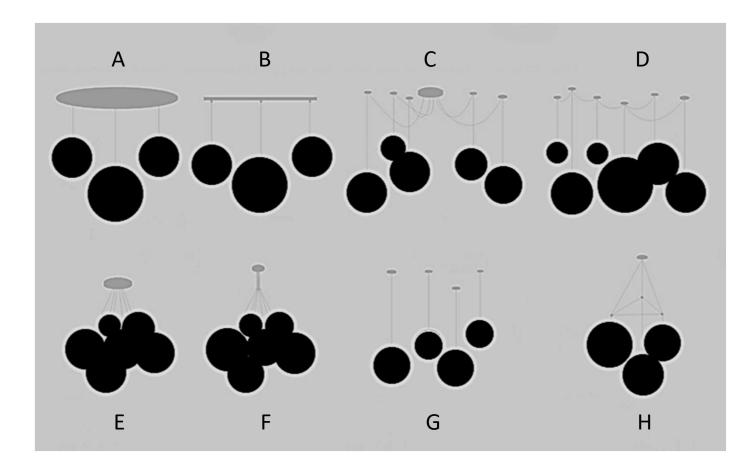

## **ORDERING INFORMATION**

Ordering Example: LI-WP02WG-L-D-10-30-1-PD-WH

Model	Shade Type	Canopy Type	Watts (Lamp)	Nominal Lumen (Lamp)	CRI (Lamp)	Color Temp (Lamp)	Voltage	Dimmable	Finish
LI-WP02WG	S M L	A E B F C G D H	5-5W 10-10W	400 800	80	27-2700К 30-3000К 35-3500К	1-PoE-N	PD-PoE Dim.	WH-White BL-Black OG-Orange

