



POWERED BY LED INDUSTRIES

PROJECT:

TYPE:

Rosa Pendant

The pendant is crafted from finished steel and aluminum. The simplistic conservative design allows for a multitude of applications. This pattern can be used in a present day as well as a more conventional one. The half sphere shades allows for a smooth surroundings light distribution, in which it can create a sense of comfort and tranquility. The straightforward yet sophisticated design can be a spectacular piece for any application.


- **SPECIFICATIONS:**
 - **Material:**
 - Aluminum & Steel
 - **Dimensions:**
 - **Length:** 10" to 36" stem
 - **Shades:** 16.5"W
 - **Canopy:** 5"
- **ELECTRICAL:**
 - **Input Voltage:**
 - PoE
 - **Wattage (W):**
 - Min 5W
 - Max 10W
 - **LED Lumen/Watt:** 120 L/W
 - **Light Source:** 3 X E-26 Lamp
 - **IP Rating:** IP 20
 - **Controls:** 100% dimming with PoE Driver.
- **MOUNTING:**
 - Ceiling Mounted
- **LABELS:**
 - ETL conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0.
 - LED light assembly conforms to UL 2108 for remote installation.
 - RoHS compliant
- **WARRANTY:**
 - 5-Year Limited Warranty



Page 1 of 2

Rosa Pendant

Dimensions:

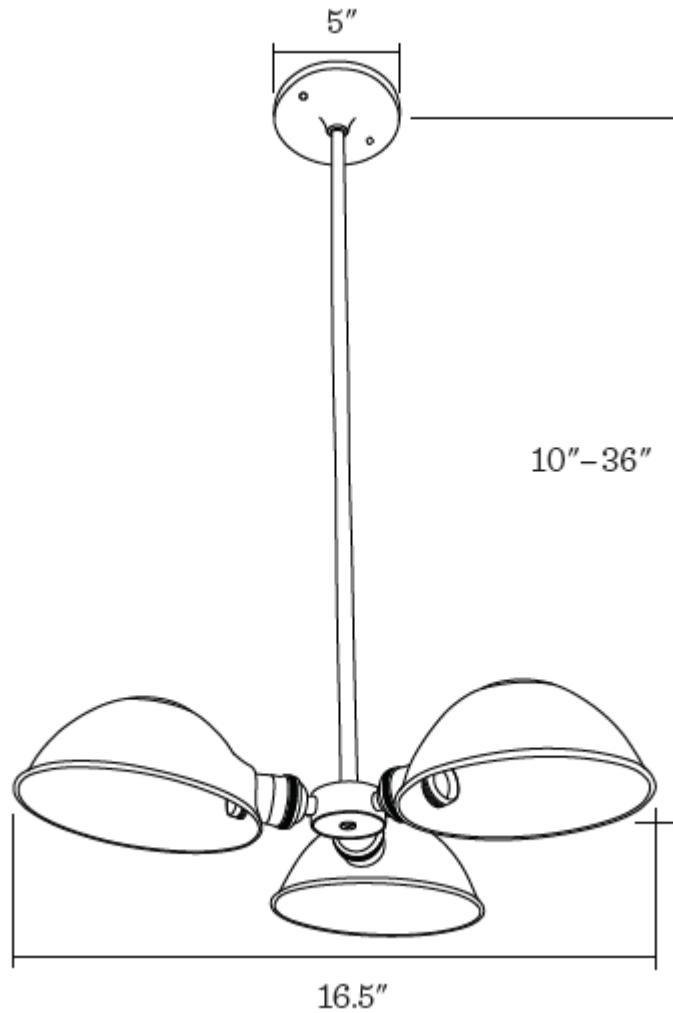

ORDERING INFORMATION:

Ordering Example: LI-RPDL-1410-X-30K-1-X-X-X

Model	Watts (Lamps)	Nominal Lumen (Lamps)	CRI (Lamps)	Color Temp (Lamps)	Voltage	Dimmable	Body Finish	Shade Finish
LI-RPDL-1410	3 - 5W 3 - 10W	1800W	>85	27-2700K	1-PoE-N	PD-PoE Dim.	BL-Black	BL-Black
		3600W		30-3000K			SN-Satin Nickle	WH-White
				35-3500K			GL-Gold	TL-Teal
							NY-Navy	
								PE-Persimmon