

# Deep Reflector Downlight

6"inch Trim

PROJECT:
TYPE:



## SPECIFICATION:

### **DARK LIGHT:**

Dark light sets a more natural mood because you cannot see the artificial light source, thereby creating unobtrusive lighting. Instead of having bright areas of light dominating a space, dark light luminaires can be used to create a discreet lighting setup where it is hard to notice where the light comes from.

### **TRIM :**

6 Inch LED Downlight Trim Flush Mount Recessed Light Fixture is designed for lasting durability and beauty while providing quality and energy efficient lighting for low to medium ceilings. Module construction includes LED, heat sink, reflector, lens, baffle and trim ring

### **MOUNTING:**

Two steel torsion springs mounting are pre-installed allow for easy and secure mounting in most 5" and 6" IC and non-IC housings.


### **OPTICS:**

Lens Clear Tempered, Sand Blasted

### **DIMMING:**

Dimming with PoE-Node.

### **BEAM ANGLE:**



## FEATURES:

- Product Specification LED Downlight
- Model LI – DRD06-XX
- CCT 2700K, 3000K, 4000K
- Description 6" Downlight
- CRI  $\geq 90$
- Finishes White - See below for details
- Reflector Black, Silver, White
- Power 30W, 35W
- Input Voltage PoE-CC
- Suitable Dry, damp, wet locations.
- Operating Temperature -65
- Power Factor  $>0.9$
- Lumens 80lm / w
- Dimming Yes
- Certification ETL
- Warranty 5 years

## ELECTRICAL:

**Input Voltage:** PoE-CC

**Lumens / Wattage:** 2400lm / 30W, 2800lm / 35W

**Color Temperature:** 2700K, 3000K or 4000K

**CRI:**  $\geq 90$

**Life Time:** 50,000 hours

## CERTIFICATE:

ETL

## WARRANTY:

Five-years limited warranty.




Due to continuous improvements, the information herein may be changed without notice


# Deep Reflector Downlight

6"inch Trim

## Dimension :

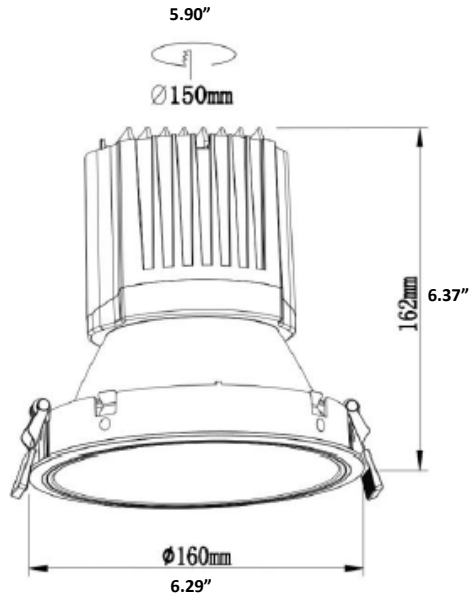

## IC Housing :

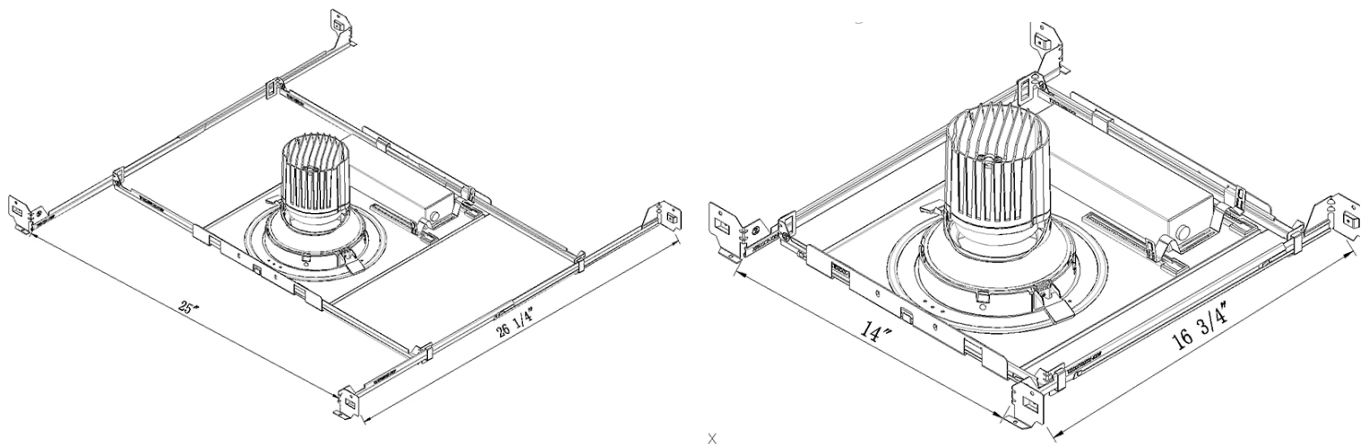

Due to continuous improvements, the information herein may be changed without notice

# Deep Reflector Downlight

6"inch Trim



Deep Reflector


Lens types :



Black

Sliver

White



Honeycomb



Solite

Ordering Example: -LI-DRD06-1-1-1

Series	Power	Voltage	Color Temp.	Beam	Finish	Reflector	Dimming	Lens
LI-DRD06-XX	1 = 30W 2 = 35W	30 @ 0.835A 35 @ 0.972A	1 = 2700K 2 = 3000K 3 = 4000K	1 = 15 2 = 24 3 = 38	1 = White 2 = Custom	1 = Black 2 = Sliver 3 = Golden	Yes	1 = Solite 2 = Honeycomb

Due to continuous improvements, the information herein may be changed without notice