

The PoE Crescentoid Pendant is created with a brushed brass metal core which creates two distinct halves of diffused white light. Each half is made from opal acrylic which eliminates any glare, resulting in a soft source of light. Although out of alignment, the Crescentoid Pendant is still balanced with sophistication, and will instantly command attention in any room it is placed in.

Our intelligent LED PoE lighting solutions accelerates digital transformation of facilities in Internet of Thing (IoT) while providing an excellent option to the lighting designer or building management companies that are seeking aesthetic pleasure with digital building solutions throughout the facilities with option of covering multiple building network. Beyond considerations of cost and efficiency.

SPECIFICATIONS:

- Input Voltage: PoE Compatible
- Wattage (W): 5W, 10W Bulb E27
- Lumens (L): 130 lm/W
- CRI >85
- Damp location rated, IP20
- Controls 0-10V dimming with PoE driver




POE LIGHTING SOLUTIONS
POWERED BY LED INDUSTRIES

Crescentoid
Pendant

Style: Transitional



Dimensions :

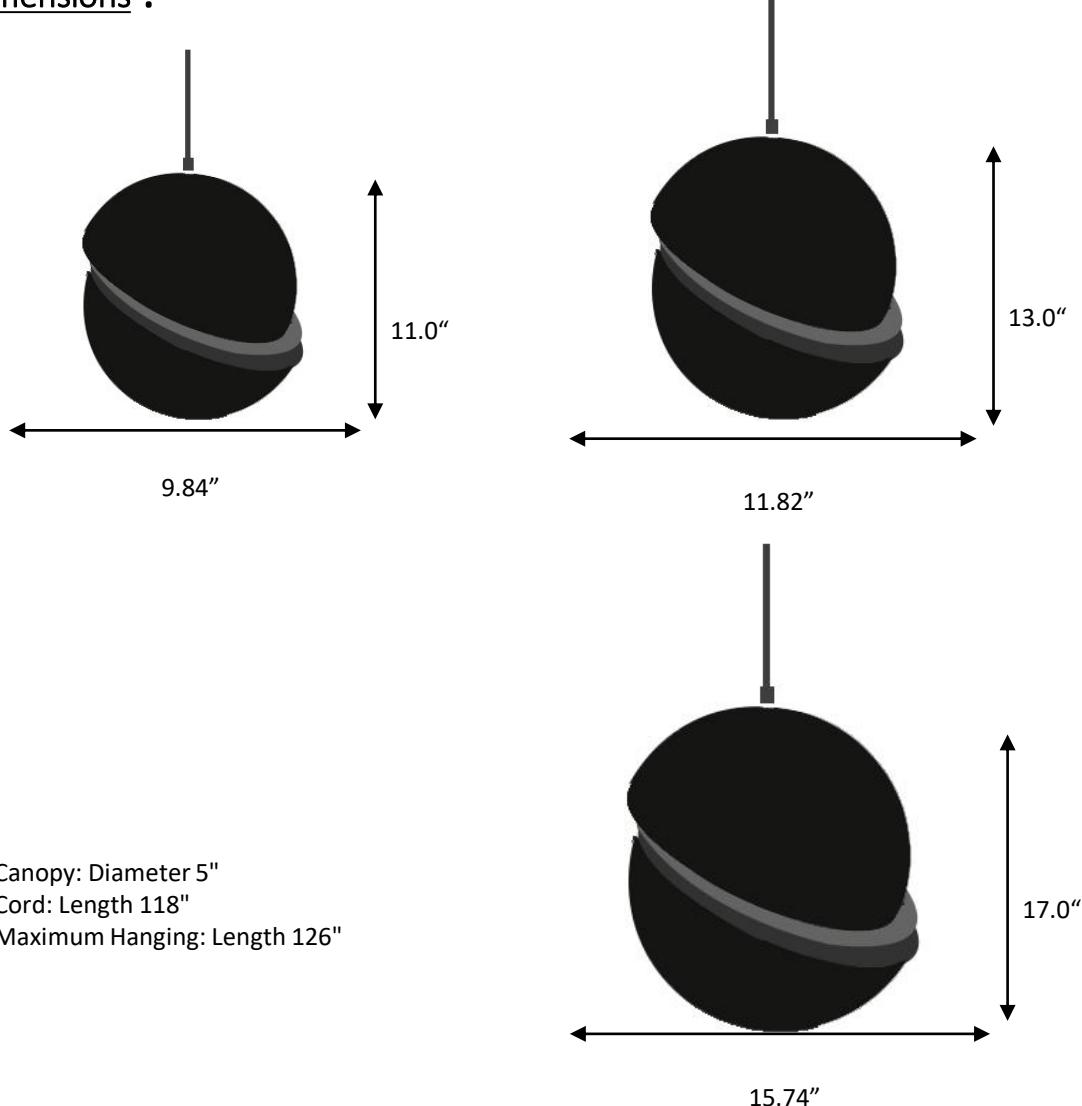

- Canopy: Diameter 5"
- Cord: Length 118"
- Maximum Hanging: Length 126"

Ordering Example:

LI-PoE-RSP-03BCGW

ORDERING INFORMATION

Model	Watts	Lumen	PoE	Color Temp.	CRI	PoE Dimmable	Finish
LI-PoE-RSP-03BCGW	1=5W 2=10W	130 lm/W	<u>Compatible</u>	1 = 2700K 2 = 3000K 3 = 3500K	>85	Yes	Black, Copper, Green, White