

LED Wall Washer



Catalog #		Type
Project		
Comments		Date
Prepared by		

Product Description:

LED RGBW Wall washer outdoor lights apply to outdoor facade illumination available in high and standard outputs with multiple color temperature options. These Linear fixtures are PoE nodes base controllable and DMX controllable, easy to install and connect via daisy chain using a combined power and data connector (available on request) and are designed to provide superior performance and efficacy in both interior and exterior applications.

Features:

- Low thermal resistance, high efficiency LEDs used, low light decay.
- Rate extends LEDs life span to 30,000 hrs.
- The lamp body adopts aviation aluminum, has good heat dissipation performance
- Used for exterior

Specification:

Material:

Aluminum alloy +PC Cover + Tempered glass + transparency + anti-impact

Lens:

Optional optical lens

Controls:

PoE Dimming
0-10V Dimming
DMX Controls

PoE:

PoE nodes provide power distribution architecture and data connectivity to create a fully functioning Power over Ethernet (PoE) lighting control system.

Electrical:

- Input Voltage: PoE / 120V
- WaΣage: 6W, 9W, 18W
- Color Temperature: W/NW/WW/RGB/RGBW
- Operating Temperature: -20c~40c
- Protection RaΣng: IP68 Waterproof
- CRI: ≥ 80 or 90
- Life Time: 50,000 hours

Certificate:

ETL conforms to UL STD 1598; Certified to CAN/CSA STD C22.2

LED light assembly Conforms to UL 2108 for remote installation

RoHS compliant

Warranty:

Five-years limited warranty.




Last update: 2020

Due to continuous improvements, the information herein may be changed without notice


LED Wall Washer

Photometrics:


Distribution Curve

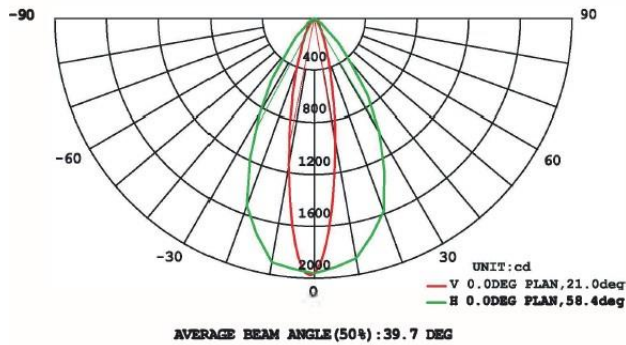

Illumination At A Distance:

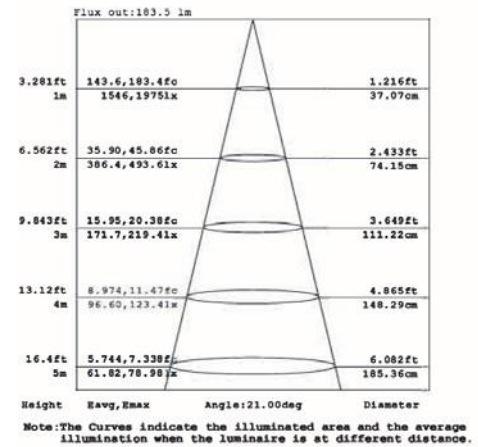

Dimensions:

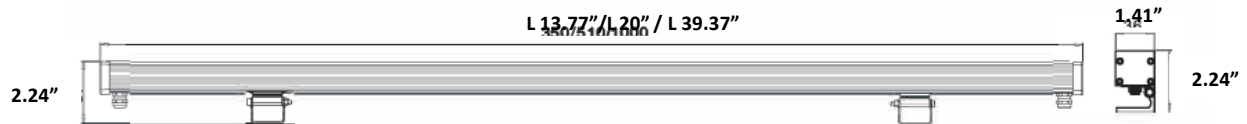

ORDERING GUIDE

Ordering Example: LI-LWW-TL-W36-30-27K-1-PD-SL

Model	Wattage	LED Qunaity	Lumens	Size (L X W X H)	Lens	Color Temp	Voltage	Dimmable	Finish
LI-LWW-TL-W36-L13	6W	6	1036lm	13.77" x 1.41" x 2.24"	15 - 15	27K-2700K	1 - PoE 2 - 120V	PD - PoE Dim. ND - Normal Dim	SL - Sliver BL - Black
LI-LWW-TL-W36-L20	9W	9	1169lm	20" x 1.41" x 2.24"	30 - 30	30K- 3000K			
LI-LWW-TL-W36-L39	18W	18	1724lm	39.37" x 1.41" x 2.24"	45 - 45	40K- 4000K			
					60 - 60	RGB - RGB RGBW - RGBW			

Last update: 2020

Due to continuous improvements, the information herein may be changed without notice