




POWERED BY LED INDUSTRIES

PROJECT:
TYPE:

LINEAR LED LIGHTLISCIO 2.1 Trim

Continuous Clean Lines and Clean Light
Trim Version

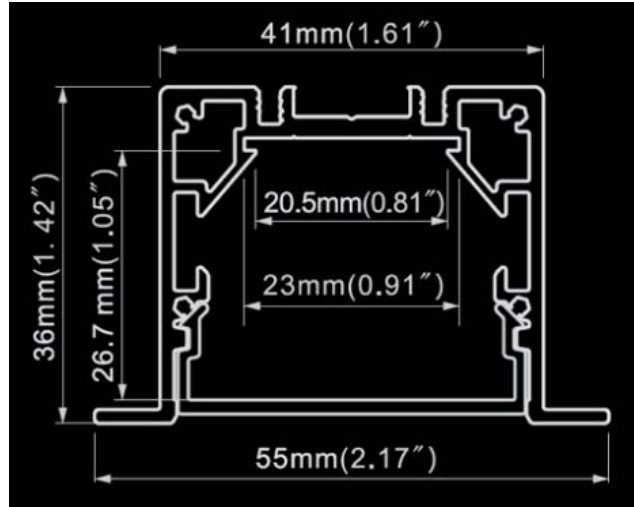

ORDERING INFORMATION

Model	Mounting	Type	Wattage (Length)	Input & Dim.	Color Temp	Cover	Light Distribution	Profile Finish
LI-L5536T	R-Recessed	D - Direct	36W – 4'	1-PoE-Dim.	27K-2700K	PDM – Standard	1-100% Down	BL- Black
			54W – 6'		30K-3000K	Diffuser (96°)		WH- White
			80W – 8'		35K-3500K	UGR<19 – (81°)		SL- Sliver
			CU – Custom*		40K-4000K			
								TW-Tunable White (27K-60K)

Product Description:

The linear light Liscio series was designed to achieve different shape designs with easy and quick connection. Those products have re-defined user experience of linear light through modularity design and quick assembly & installation.

It breaks the idea which restricted traditional lighting fixtures and created complicated wiring of old version linear light fixtures. It has achieved "three quicks": quick assembly, quick connection (eliminates complicated wiring) and quick corner connection.





POWERED BY LED INDUSTRIES

LINEAR LED LIGHTLISCIO 2.1 Trim

Continuous Clean Lines and Clean Light

Trim Version

Product Description:

The Liscio linear light quick connection series is based on concise style and user experience improvement. Various concise yet fashionable designs can be accomplished quickly through the creative ideas of space lighting designs and free design styles while emphasizing "QUICK" installation. Liscio permits the designer to create much better lighting effects than traditional lighting fixtures by revealing the beauty of linear light.

Feature:

- Low glare version available upon request UGR<19 rated.
- End caps assembled by mechanical screws and magnet structure.
- Lighting CCT/color and CRI could be customized.
- Internal 3-in-1 dimming function.
- Conform to ETL standard.
- Easy assembly/disassembly, customers do not need to do complicated wiring, use male/female connectors to connect electric power and to do free connection to get comfortable user experience.

ORDERING INFORMATION: LI-L5536T-36W

Product	LI-L5536T-4
Cover	Plain diffuser
Length	(4ft)
Installation	Recessed
Profile Color	Silver/White/Black
CCT (K)	2700K, 3000K, 3500K, 4000K, TW 27K-60K
Nominal Lumen (lm)	4151lm
Direct Watt / Lumens	36W / 4151lm
Beam Angle (°)	95° (Plain diffuser)
CRI (Ra)	≥80 ≥90Optional
Watts	36W
Power Factor	> 0.9
Watt (w)	9W Per feet
Using Ambient Temp	Tamin=-20°C, Tamax=45°C
Protection	IP 40



POWERED BY LED INDUSTRIES

LINEAR LED LIGHT LISCIO 2.1 Trim

Continuous Clean Lines and Clean Light

Trim Version

Product Description:

The Liscio linear light quick connection series is based on concise style and user experience improvement. Various concise yet fashionable designs can be accomplished quickly through the creative ideas of space lighting designs and free design styles while emphasizing "QUICK" installation. Liscio permits the designer to create much better lighting effects than traditional lighting fixtures by revealing the beauty of linear light.

Feature:

- Low glare version available upon request UGR<19 rated.
- End caps assembled by mechanical screws and magnet structure.
- Lighting CCT/color and CRI could be customized.
- Internal 3-in-1 dimming function.
- Conform to ETL standard.
- Easy assembly/disassembly, customers do not need to do complicated wiring, use male/female connectors to connect electric power and to do free connection to get comfortable user experience.

ORDERING INFORMATION: LI-L5536T-54W

Product	LI-L5536T-6
Cover	Plain diffuser
Length	(6ft)
Installation	Recessed
Profile Color	Silver/White/Black
CCT (K)	2700K, 3000K, 3500K, 4000K, TW 27K-60K
Nominal Lumen (lm)	6750lm
Direct Watt / Lumens	54W / 6750lm
Beam Angle (°)	95° (Plain diffuser)
CRI (Ra)	≥80 ≥90Optional
Watts	54W
Power Factor	>0.9
Watt (w)	9W Per feet
Using Ambient Temp	Tamin=-20°C, Tamax=45°C
Protection	IP 40



POWERED BY LED INDUSTRIES

LINEAR LED LIGHTLISCIO 2.1 Trim

Continuous Clean Lines and Clean Light

Trim Version

Product Description:

The Liscio linear light quick connection series is based on concise style and user experience improvement. Various concise yet fashionable designs can be accomplished quickly through the creative ideas of space lighting designs and free design styles while emphasizing "QUICK" installation. Liscio permits the designer to create much better lighting effects than traditional lighting fixtures by revealing the beauty of linear light.

Feature:

- Low glare version available upon request UGR<19 rated.
- End caps assembled by mechanical screws and magnet structure.
- Lighting CCT/color and CRI could be customized.
- Internal 3-in-1 dimming function.
- Conform to ETL standard.
- Easy assembly/disassembly, customers do not need to do complicated wiring, use male/female connectors to connect electric power and to do free connection to get comfortable user experience.

ORDERING INFORMATION: LI-L5536T-80W

Product	LI-L5536T-8
Cover	Plain diffuser
Length	(8ft)
Installation	Recessed
Profile Color	Silver/White/Black
CCT (K)	2700K, 3000K, 3500K, 4000K, TW 27K-60K
Nominal Lumen (lm)	9450lm
Direct Watt /Lumens	80W / 9450lm
Beam Angle (°)	95° (Plain diffuser)
CRI (Ra)	≥80 ≥90Optional
Watts	80W
Power Factor	>0.9
Watt (w)	9W Per feet
Using Ambient Temp	Tamin=-20°C, Tmax=45°C
Protection	IP 40




POWERED BY LED INDUSTRIES

LINEAR LED LIGHTLISCIO 2.1 Trim

Continuous Clean Lines and Clean Light



Trim Version

Mounting Option

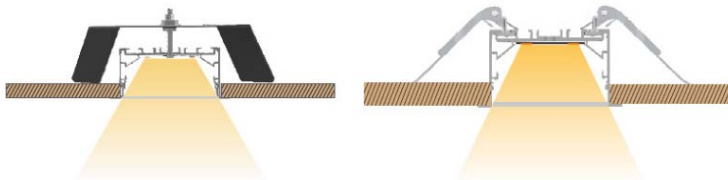

Recessed

Dimensions

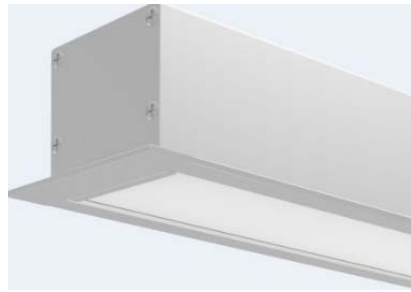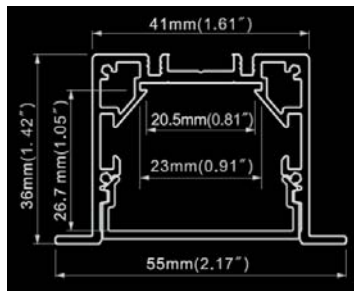

DIFFUSERS & END CAPS



PC cover W20T-CV



UGR cover W20T-UGR



End cap DE-T2

RECESSED ACCESSORIES



Recessed clip
R-BI-T2

CORNERS & CONNECTORS



Straight connector
R-180



Corner connector
90L-T2



Corner connector
90W-T2



Corner connector
90N-T2



T shape connector
90T-T2



X shape connector
90X-T2




POWERED BY LED INDUSTRIES

LINEAR LED LIGHTLISCIO 2.1 Trim



Continuous Clean Lines and Clean Light

Trim Version




Spectroscopic Data



PDM

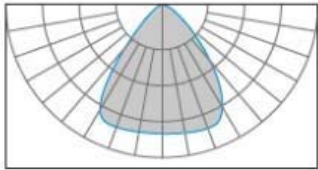

UGR < 19

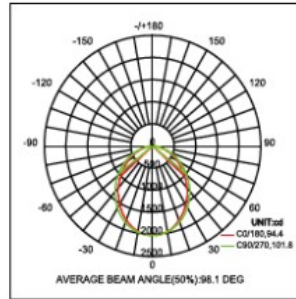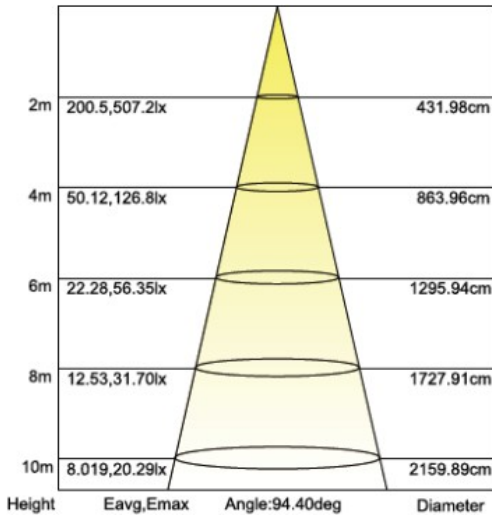







POWERED BY LED INDUSTRIES

LINEAR LED LIGHTLISCIO 2.1 Trim

Continuous Clean Lines and Clean Light

Trim Version

Creating Clean line for custom length

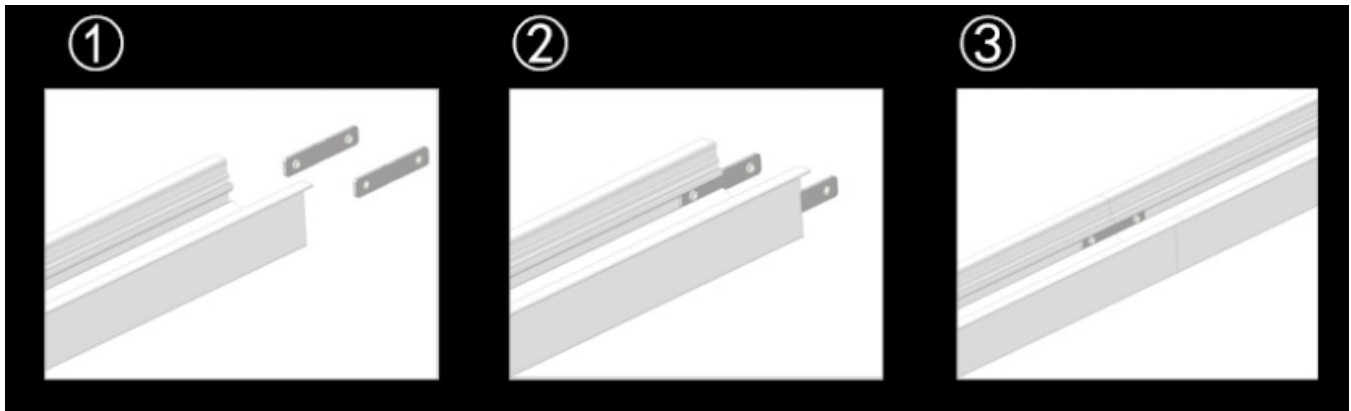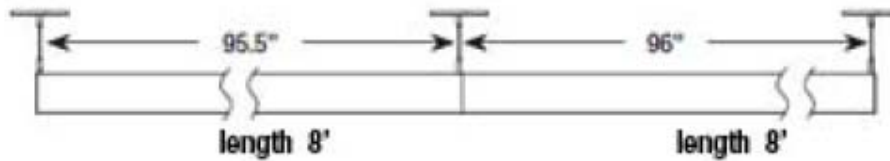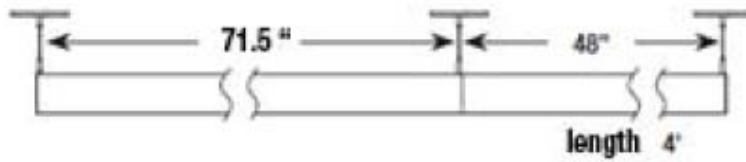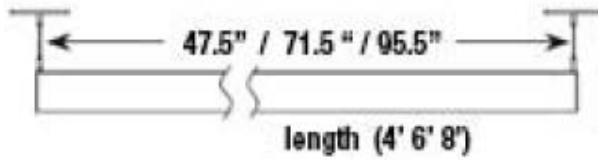



POWERED BY LED INDUSTRIES

LINEAR LED LIGHT LISCIO 2.1 Trim

Continuous Clean Lines and Clean Light

Trim Version



← 2700K-3300K Warm White 4200K-4500K Natural White




CRI 80



CRI 90

1m	234.2,997lx	356.29cm
2m	58.56,248.3lx	712.59cm
3m	26.03,110.8lx	1068.88cm
4m	14.64,62.31lx	1426.17cm
5m	9.370,39.88lx	1781.46cm
6m	6.507,27.69lx	2137.76cm
7m	4.781,20.35lx	12494.05cm
8m	3.660,15.58lx	2850.34cm
9m	2.882,12.31lx	3206.63cm
10m	2.342,9.970lx	3562.93cm

Height Eavg,Emax Angle:121.39deg Diameter

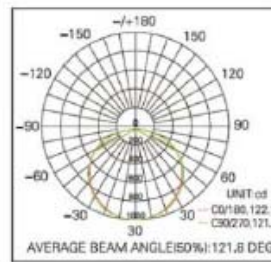

Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$