POWERED BY LED INDUSTRIES

Features:

- Novel design, beautiful lighting effect;
- High acoustic quality material to abosorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, meeting room, cinema, library, etc.

Acoustic Series

POWERED BY LED INDUSTRIES

Features:
- Novel design, beautiful lighting effect;
- High acoustic quality material to abosorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:
Hotel, office, meeting room, cinema, library, etc.

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AT Anthracite · LR Light Grey · JB Jet Black

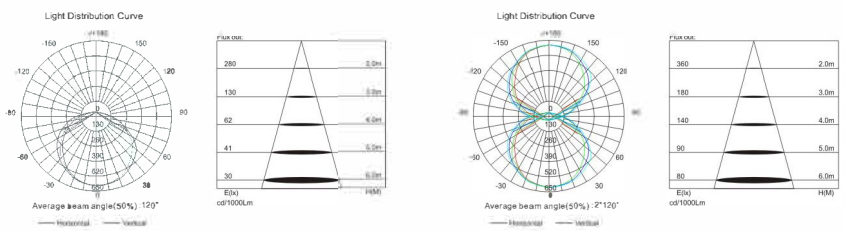

OSRAM · SAMSUNG · Architectural · Indoor · Protective grounding · High efficiency · No flicker · Damp location · 10V Dimmable · DALI Dali · 5 Year Warranty · Color Tuning · RGB

Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LI-LL0189H1S-1200	constant current or constant voltage	36W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	105	Osram	120	Suspended	Alu+PC+ polyester fiber	53*188*1200	2.1*7.4*47.2
LI-LL0189H2S-1200		36W									53*288*1200	2.1*11.4*47.2
LI-LL0189H3S-1200		36W									53*388*1200	2.1*15.3*47.2
LI-LL0189H1UDS-1200	constant current or constant voltage	50W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	105	Osram	120*2	Suspended	Alu+PC+ polyester fiber	53*188*1200	2.1*7.4*47.2
LI-LL0189H2UDS-1200		50W									53*288*1200	2.1*11.4*47.2
LI-LL0189H3UDS-1200		50W									53*388*1200	2.1*15.3*47.2

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

Acoustic Series

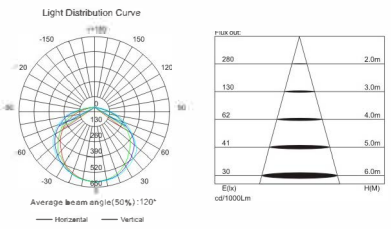

OSRAM SAMSUNG

Architectural · Indoor · Protective grounding · High efficiency · No flicker · Damp location · 10V Dimmable · DALI Dali · 5 Year Warranty · Color Tuning · RGB

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AT Anthracite · LR Light Grey · JB Jet Black

Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LI-LL0190SAC-40W	constant current or constant voltage	40W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	105	Osram	120	Suspended	Alu+PC+ polyester fiber	563*501*188(L300)	22.2*19.7*7.4
LI-LL0190SAC-80W		80W									1081*963*188(L600)	42.6*37.9*7.4
LI-LL0190SAC-120W		120W									1600*1426*188(L900)	63.0*56.1*7.4
LI-LL0190UDSAC-50W	constant current or constant voltage	50W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	105	Osram	120*2	Suspended	Alu+PC+ polyester fiber	563*501*188(L300)	22.2*19.7*7.4
LI-LL0190UDSAC-100W		100W									1081*963*188(L600)	42.6*37.9*7.4
LI-LL0190UDSAC-140W		140W									1600*1426*188(L900)	63.0*56.1*7.4

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

CE SAA IEC ErP RoHS ETL DLC

Acoustic Series

OSRAM SAMSUNG

Architectural · Indoor · Protective grounding · High efficiency · No flicker · Dimmable · Dali · 5 Year Warranty · Color Tuning

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AT Anthracite · LR Light Grey · JB Jet Black

CRI(Ra): ≥80 or ≥90
CCT(K): 3000/4000/5000
PF: ≥0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 300°
Installation: Suspended
Material: Alu+PC+polyester fiber





Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LI-LL01255AC-32W	32W	constant current or constant voltage	D600*35*32	D23.6*1.4*1.3
LI-LL01255AC-40W	40W		D900*35*32	D35.4*1.4*1.3
LI-LL01255AC-70W	70W		D1200*35*32	D47.2*1.4*1.3
LI-LL01255AC-80W	80W		D1500*35*32	D59.1*1.4*1.3

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

Architectural · Indoor · Damp location · 5 Year Warranty

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AN Anthracite · LR Light Grey · JB Jet Black

Model	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LI-LL0186SAC-480	Suspended	Alu+ polyester fiber	480*416*80(ID480)	18.9*16.4*3.1
LI-LL0186SAC-600			600*520*80(ID600)	23.6*20.5*3.1
LI-LL0186SAC-900			900*780*80(ID900)	35.4*30.7*3.1
LI-LL0186SAC-1200			1200*1040*80(ID1200)	47.2*40.9*3.1

Architectural · Indoor · Damp location · 5 Year Warranty

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AN Anthracite · LR Light Grey · JB Jet Black

Model	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LI-LL0186MAC-480	Surface Mounted	Alu+ polyester fiber	480*416*95(ID480)	18.9*16.4*3.7
LI-LL0186MAC-600			600*520*95(ID600)	23.6*20.5*3.7
LI-LL0186MAC-900			900*780*95(ID900)	35.4*30.7*3.7
LI-LL0186MAC-1200			1200*1040*95(ID1200)	47.2*40.9*3.7

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

Acoustic Series

OSRAM SAMSUNG

Architectural | Indoor | Protective grounding | High efficiency | No flicker | Damp location | 10V Dimmable | DALI | 5 Year Warranty | Color Tuning | RGB

YL Yellow | CB Cobalt | SB Sky Blue | OG Orange | RD Red | LG Lime Green | AT Anthracite | LR Light Grey | JB Jet Black

CRI(Ra): ≥80 or ≥90
CCT(K): 3000/4000/5000
PF: ≥0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 160°
Installation: Suspended / Surface Mounted
Material: Alu+PMMA+polyester fiber





Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LI-LL0201SAC-15W	15W	constant current or constant voltage	D360*88	D14.2*3.5
LI-LL02015AC-25W	25W		D450*88	D17.7*3.5
LI-LL02015AC-36W	36W		D600*88	D23.6*3.5
LI-LL0201SAC-50W	50W		D800*88	D31.5*3.5
LI-LL0201MAC-15W	15W	constant current or constant voltage	D360*116	D14.2*4.6
LI-LL0201MAC-25W	25W		D450*116	D17.7*4.6
LI-LL0201MAC-36W	36W		D600*116	D23.6*4.6
LI-LL0201MAC-50W	50W		D800*116	D31.5*4.6

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

POWERED BY LED INDUSTRIES

OSRAM SAMSUNG

Architectural · Indoor · Protective grounding · High efficiency · No flicker · Damp location · 10V Dimmable · DALI · 5 Year Warranty · Color Tuning · RGB

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AT Anthracite · LR Light Grey · JB Jet Black

CRI(Ra): ≥80 or ≥90
CCT(K): 3000/4000/5000
PF: ≥0.9
Efficiency(LM/W): 70
LED type: Samsung
Beam angle: 120°
Installation: Suspended/Surface Mounted
Material: Alu+PMMA+polyester fiber





Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LI-LL0118SAC-20W	20W	constant current or constant voltage	D600*140	D23.6*5.5
LI-LL0118SAC-40W	40W		D900*140	D35.4*5.5
LI-LL0118SAC-40W	40W		D1200*140	D47.2*5.5
LI-LL0118MAC-20W	20W	constant current or constant voltage	D600*175	D23.6*6.9
LI-LL0118MAC-40W	40W		D900*175	D35.4*6.9
LI-LL0118MAC-40W	40W		D1200*175	D47.2*6.9

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698

POWERED BY LED INDUSTRIES

Acoustic Lighting Series

Features:

- Novel design, beautiful lighting effect;
- High acoustic quality material to abosorb noise;
- Different colors for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient

Application:

Hotel, office, meeting room, cinema, library, etc.

YL Yellow · CB Cobalt · SB Sky Blue · OG Orange · RD Red · LG Lime Green · AT Anthracite · LR Light Grey · JB Jet Black





OSRAM · SAMSUNG · Architectural · Indoor · Protective grounding · High efficiency · No flicker · Damp location · 10V Dimmable · DALI · 5 Year Warranty · Color Tuning · RGB

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LI-LL0202SAC	LI-LL0202SAC-15W	constant current or constant voltage	15W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	70	Samsung	160	Suspended	Alu+PMMA +polyester fibe	360*360*88	14.2*14.2*3.5
	LI-LL0202SAC-25W		25W									450*450*88	17.7*17.7*3.5
	LI-LL0202SAC-36W		36W									600*600*88	23.6*23.6*3.5
	LI-LL0202SAC-50W		50W									800*800*88	31.5*31.5*3.5
LI-LL0202MAC	LI-LL0202MAC-15W	constant current or constant voltage	15W	≧80 or ≧90	3000K/ 4000K/ 5000K	≧0.9	70	Samsung	160	Surface Mounted	Alu+PMMA +polyester fibe	360*360*116	14.2*14.2*4.6
	LI-LL0202MAC-25W		25W									450*450*116	17.7*17.7*4.6
	LI-L0202M AC-36W		36W									600*600*116	23.6*23.6*4.6
	I LI-L0202MAC-50W		50W									800*800*116	31.5*31.5*4.6

LED Industries Inc
www.poelightingusa.com
13450 FM 529 Rd Houston TX
Phone: 800-784-0698