

Belted Brilliance


Lighting Redefined





POWERED BY LED INDUSTRIES

PROJECT:
TYPE:

Cutting Edge Track Light System

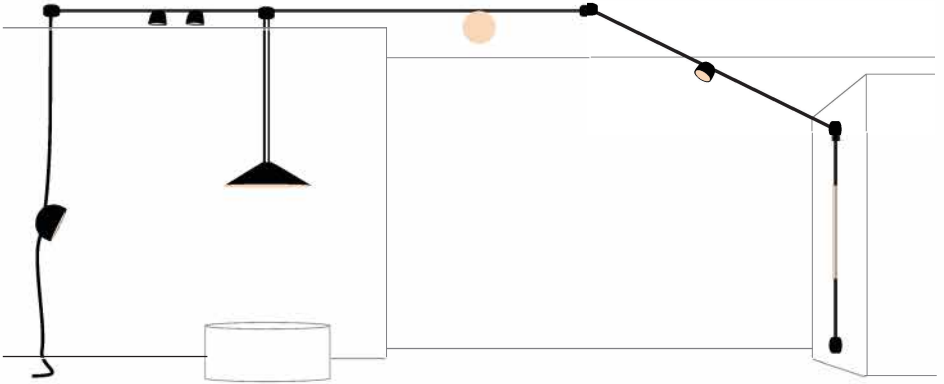

Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement

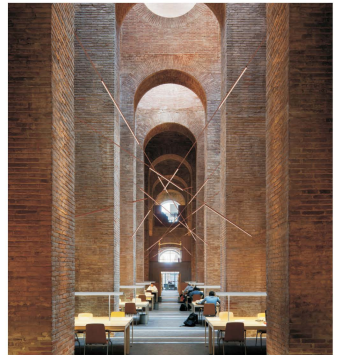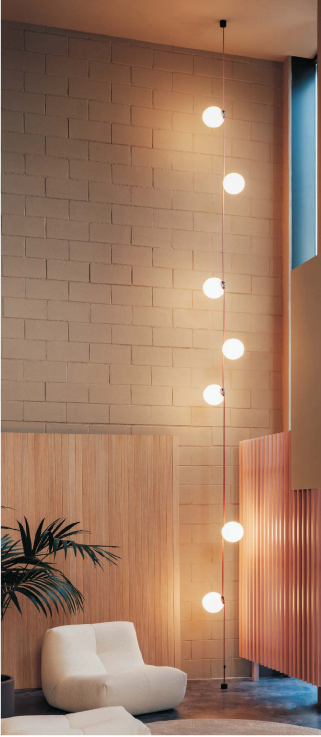

Belted Brilliance: Where Artistry Meets Illumination

- Creative flexible fabric belt track design
- Integration of materiality, lighting, and building elements
- Shaping atmospheres with a unique approach

Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement



BELT END-POINT TERMINATIONS

Belt terminations can be adjusted during the installation process according to your preference.



Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement



Luna

360° Diffusion lighting

It captures the attention with a calming gaze directed towards the light source, establishing a peaceful and highly comfortable ambiance. The illumination blankets all surfaces within the space, fostering a serene, more enriched, and remarkably uniform environment.

Diameter:
8" , 12"

Color Temp:
2700-5000K



Hemisphere

Directed diffusion lighting

Produces gentle illumination, which minimizes the contrast between the lit space and its shadows. The opaque portion of the lampshade directs light through the diffuser, delivering both tranquil and focused lighting effects.

Diameter:
4" , 8" , 12"

Color Temp:
2700-5000K



Cone

Directed diffusion lighting

Produces a gentle glow, fostering a subtle interplay between the illuminated space and its shadows. The opaque component of the lampshade channels light through the diffuser, resulting in a serene ambiance and precise lighting focus.

Diameter:
16" , 24" , 32"

Color Temp:
2700-5000K

Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement



<eYki "

: h[Y] [Z": \ki ed`B] ^j_d] "

: c_ji "iey" b] ^j, "Yr[Vy_d] " W t@m" YedjrWj "

X[tm[[d"j^ ["tkc_dVy[Z"Vh[WVdZ"j^ ["YWj "

i^VZemi \$J^i "tof ["e\`b] ^j_d] "i "f Vh_j Yk bVh" "


i k_jVXh "eh" h[VZ_d] "i Y[dVh"ei "eh" m^ [d"j^ ["

b] ^j_i Z_h[Y] t_1_i Xh, W"j_Ze [i "def" reZkY ["

] bVh_d] b] ^j \$

DiameterØ Color Temperature:
4" 2700-5000K

8[Vt 7d] t] i O
' (+ " (* + " + + +

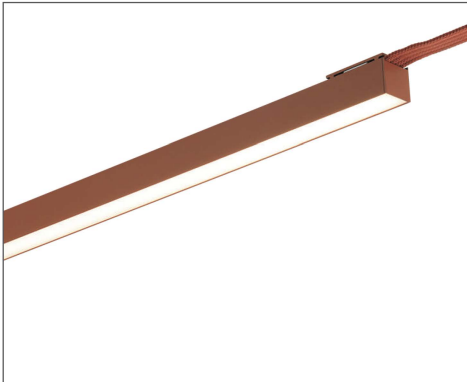

Bd] ar

: h[Y] [Z": \ki ed`B] ^j_d] "

: [b] [h" ^] ^" kd_veh jo" veh_d] " j^ ["

YekdZVy_edVb bVb[h" e\`b] ^j \$ I e_j " i^VZemi "

VdZ" i k Xj h" tkc_dei jo" Y^VWVj [hp [" j^ i "

tkc_dVy_ed" " eij [hd] " W Ye^ [i] [" i k Vb "

[d] _hedc [dj " m^ [h] " i f Vj Vb [h c [d] i "

c Wd_j Wd W^Vhc ed_eki XWVdY [

LengthØ Color Temperature:
40", 80" 2700-5000K



8[b] hW" a "

C Wh") &"c [jh [i "W W_bVXh " f [r [h] Yj h_YVb "

Yedd [Yt_ed" "

X[b] " h] d] j^ " f [riedVbi [Z" veh [W^ " "

Yec fei j_ed " \$

- 8bW" a "
- J [hWH [Z" "
- = r [[d" "
- " M^] ["

Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement



ORDERING INFO:

EXAMPLE:

FIXTURE: LI-VLL-1-15-27-8-TC

BELT: LI-BB-2-TC

PROJECT:
TYPE:

Model	Size	Beam angle	Wattage	Color Temp	CRI	Finish
Fixture:						Fixture:
Belt:						Belt:

Model	Size	Beam angle	Wattage	Color Temp	CRI	Finish
LI-VLL	1 - 8" Dia 2 - 12" Dia	N/A	15 - 15W 20 - 20W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	8 - >80 9 - >90	BLK - BLACK TC - TERRACOTTA GRN - GREEN WHT - WHITE
LI-VLH	1 - 4" Dia 2 - 8" Dia 3 - 12" Dia	N/A	10 - 10W 15 - 15W 20 - 20W			
LI-VLC	1 - 16" Dia 2 - 24" Dia 3 - 32" Dia	N/A	10 - 10W 15 - 15W 20 - 20W			
LI-VLF	1 - 4" Dia	1 - 12° 2 - 24° 3 - 55°	10 - 10W			
LI-VLLN	1 - 40" Length 2 - 80" Length	N/A	20 - 20W 40 - 40W			
LI-BB	1 - 33' Length 2 - 66' Length 3 - 98' Length	N/A	MAX 200W @ 98'			

Due to continuous improvements, the information here may be changed without notice.
LED Industries reserves the right to change specs or interchange fixtures with other comparable fixtures if needed.
All Picture shown are for illustration purpose only. Actual product may vary due to product enhancement