



Certification Information



**SPECIFICATIONS**

Designed base on the concept of "light engine modularization", making 2.8" EPIC downlight possible to be more flexible, more practical and expandable.

The features are as follows:

- \* Modularized design—easy maintenance & replacement
- \* Maximize common components to reduce stock cost
- \* Speed up the progress of new 2.8" Epic development in the future
- \* Interchangeable design to increase product flexibility
- \* Set up design norms by modularization, minimize possible faults

**Optics**

Deep baffle design helps reduce glare, equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed, making 2.8" EPIC a unique Downlight.


**• Compliance**

All combinations of fixtures, trims ETL Listed.

**• Rating**

Wet & Damp location (available in Fixed version only)  
Damp Location (Adjustable)

**• Beam Angle**



**• Diffuser**

Diffusion sheet , Striped glass, Woven glass, Honeycomb louver



**• Type**

Trim, Trimless

**• Shape**

Round, Square

**Finish**



White

Black

Selectable Power	10W, 15W, 20W
Shape	Round, Square
Input voltage	PoE: 0.416 to 0.556 Amps AC : 120-277V AC
Max Lumens	900lm - 1800lm
CRI	>90Ra
Beam Angle	25°, 35°, 45°, 55°
Color Temp	2700K, 3000K, 4000K TW 1800K-4000K, TW 2700K-6000K
Dimensions	D 2.8" x H 4.25"
Material	Aluminum
Dimming	PoE, DALI, TRIAC
Certificate	ETL
Warranty	5 years

PROJECT:
TYPE:

ORDERING INFORMATION: **Example: LI-EPIC2.8-R-T-20W-FW-20L-S20-30K-BK-DS-IC-POE**


SERIES	SHAPE	TYPE	WATTAGE	VERSION	BEAM ANGLE	CCT	FINISH	DIFFUSER	HOUSING

SERIES	SHAPE	TYPE	INPUT	VERSION	LUMEN	BEAM ANGLE	CRI	CCT	FINISH	DIFFUSER	HOUSING	DIMMING
LI-EPIC2.8	R- Round	T -Trim	10W @ 0.278A	<b>FW-Fixed</b> Wet Location	<b>10L</b> 1050 LM	<b>S20</b> 20°	>90	27K	<b>BK</b> Black	<b>DS</b> Diffusion sheet	<b>IC</b> IC Box	PoE
		S-Square	15W @ 0.416A		<b>15L</b> 1575 LM			30K				DALI
	S-Square	TL-Trimless	20W @ 0.556A	<b>FD-Fixed</b> Damp Location	<b>20L</b> 2100 LM	<b>S40</b> 40°	40K	<b>WT</b> White	<b>SG</b> Striped glass	<b>Non- IC</b> New construction plate	TRIAC	
				<b>AJ-Adjustable</b> Damp Location		<b>S55</b> 55°	TW 18-40K	<b>WG</b> Woven glass				
									<b>HL</b> Honeycomb louver			



**Dimension**

**Round Trim**


• Fixed



Dimmable





⊘ Cut out : 3 5/32" (80mm)

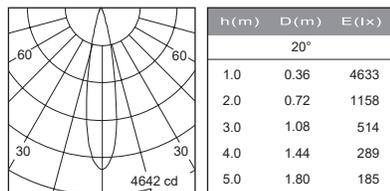


• Adjustable



Dimmable

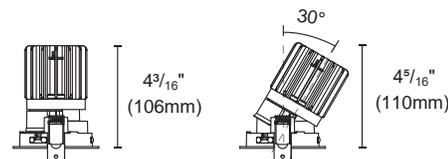

⊘ Cut out : 3 5/32" (80mm)

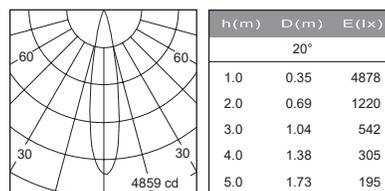


Due to continuous improvements, the information herein may be changed without notice



Dimension

Round Trimless


• Fixed



Dimmable





Cut out : 3 5/32" (80mm)

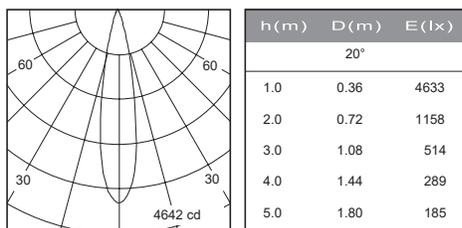


• Adjustable



Dimmable

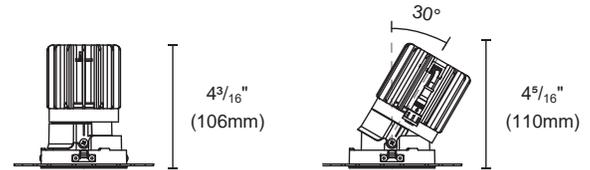

Cut out : 3 5/32" (80mm)

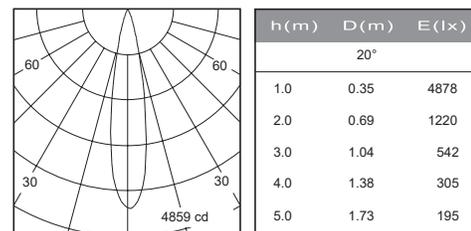



Dimension

Square Trim


• Fixed



Dimmable





Cut out : 3<sup>5</sup>/<sub>32</sub>" x 3<sup>5</sup>/<sub>32</sub>" (80 x 80mm)

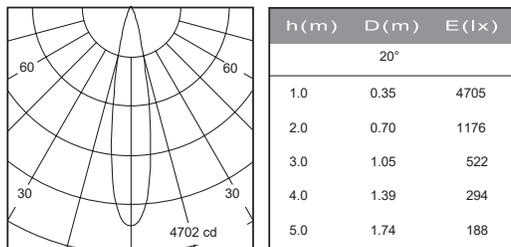


• Adjustable



Dimmable

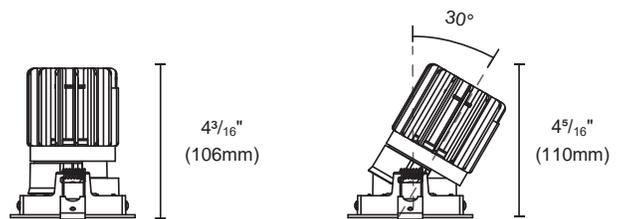


Cut out : 3<sup>5</sup>/<sub>32</sub>" x 3<sup>5</sup>/<sub>32</sub>" (80 x 80mm)

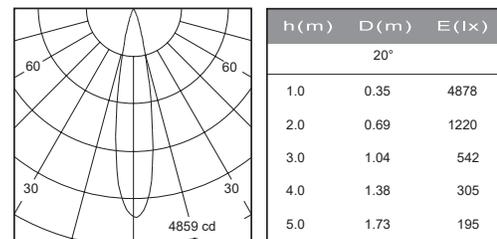



Dimension

Square Trimless


• Fixed



Dimmable





Cut out : 3 5/32" x 3 5/32" (80 x 80mm)

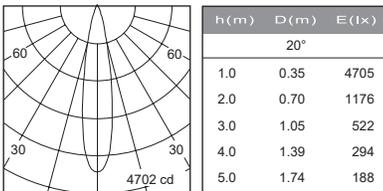


• Adjustable



Dimmable

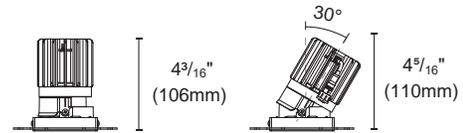


Cut out : 3 5/32" x 3 5/32" (80 x 80mm)

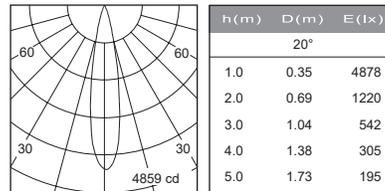


Housing Options

• New construction plate



• IC Box



Due to continuous improvements, the information herein may be changed without notice