



Certification Information



SPECIFICATIONS

Designed base on the concept of "light engine modularization", making 3.5" EPIC downlight possible to be more flexible, more practical and expandable.

The features are as follows:

- * Modularized design—easy maintenance & replacement
- * Maximize common components to reduce stock cost
- * Speed up the progress of new 3.5" Epic development in the future
- * Interchangeable design to increase product flexibility
- * Set up design norms by modularization, minimize possible faults

Optics

Deep baffle design helps reduce glare, equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed, making 3.5" EPIC a unique Downlight.


• Compliance

All combinations of fixtures, trims ETL Listed.

• Rating

Wet & Damp location (available in Fixed version only)
Damp Location (Adjustable)

• Beam Angle



• Diffuser

Diffusion sheet, Striped glass, Woven glass, Honeycomb louver



• Type

Trim, Trimless

• Shape

Round, Square

Finish



White

Black

Selectable Power	20W, 25W, 30W
Shape	Round, Square
Input voltage	PoE: 0.556 to 0.833 Amps AC : 120-277V AC
Max Lumens	1800lm - 2700lm
CRI	>90Ra
Beam Angle	20°, 30°, 45°, 55°
Color Temp	2700K, 3000K, 4000K TW 1800K-4000K, TW 2700K-6000K
Dimensions	D 3.5" x H 5"
Material	Aluminum
Dimming	PoE, DALI, TRIAC
Certificate	ETL
Warranty	5 years

PROJECT:
TYPE:

ORDERING INFORMATION: Example: LI-EPIC3.5-R-T-20W-FW-20L-S20-30K-BK-DS-IC-POE


SERIES	SHAPE	TYPE	WATTAGE	VERSION	BEAM ANGLE	CCT	FINISH	DIFFUSER	HOUSING
--------	-------	------	---------	---------	------------	-----	--------	----------	---------

SERIES	SHAPE	TYPE	INPUT	VERSION	LUMEN	BEAM ANGLE	CRI	CCT	FINISH	DIFFUSER	HOUSING	DIMMING
LI-EPIC3.5	R- Round	T -Trim	20W @ 0.556A	FW-Fixed Wet Location	20L 1800 LM	S20 20°	>90	27K	BK Black	DS Diffusion sheet	IC IC Box	PoE
		S-Square	25W @ 0.694A		25L 2250 LM			30K				DALI
	S-Square	TL-Trimless	30W @ 0.833A	FD-Fixed Damp Location	30L 2700 LM	S40 40°	40K	WT White	SG Striped glass	Non- IC New construction plate	TRIAC	
			AJ-Adjustable Damp Location		S55 55°	TW 18-40K TW 27-60K	WG Woven glass	HL Honeycomb louver				



Dimension

Round Trim


• Fixed



Dimmable




Cut out : 3³⁰/₃₂"

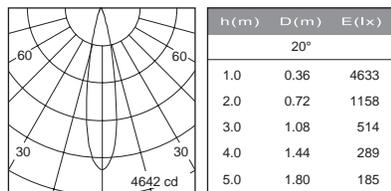


• Adjustable



Dimmable

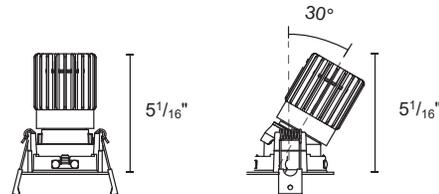

Cut out : 3³⁰/₃₂"

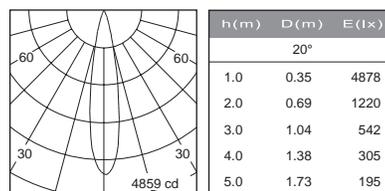


Due to continuous improvements, the information herein may be changed without notice

Dimension

Round Trimless

• Fixed



• Adjustable



Dimmable





Dimmable

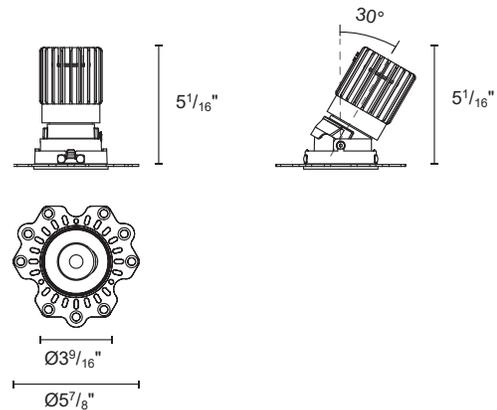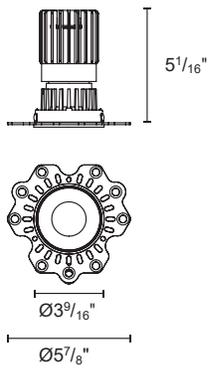

⌀ Cut out : 3³⁰/₃₂"

⌀ Cut out : 3³⁰/₃₂"

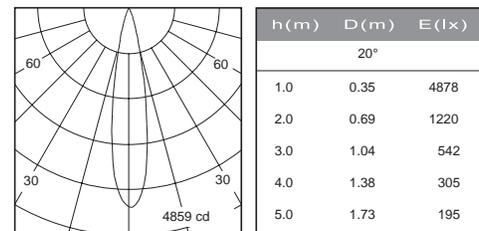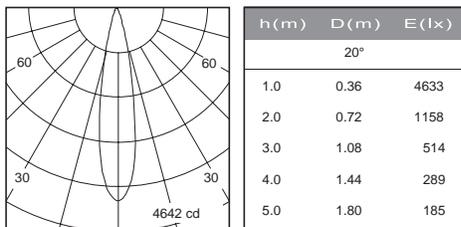

Dimension

Square Trim



• Fixed

• Adjustable





Dimmable

Dimmable

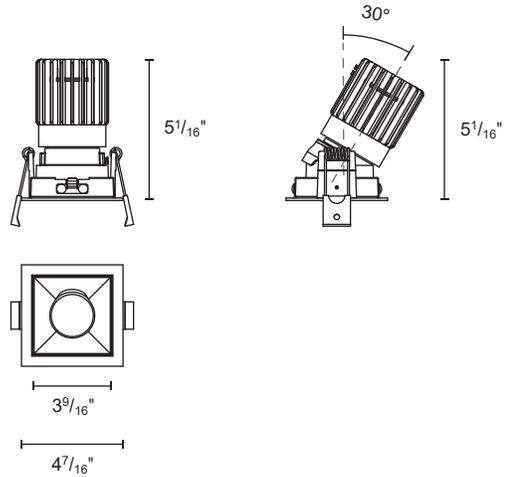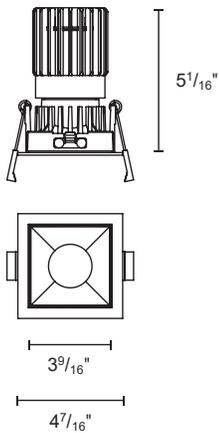

Cut out : 3^{30/32}" x 3^{30/32}"

Cut out : 3^{30/32}" x 3^{30/32}"

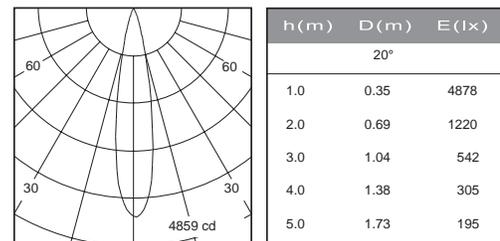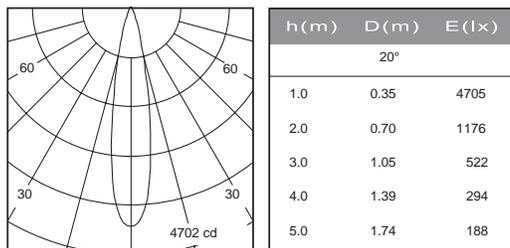


Due to continuous improvements, the information herein may be changed without notice


Dimension

Square Trimless


- Fixed



Dimmable




Cut out : 3^{30/32}" x 3^{30/32}"

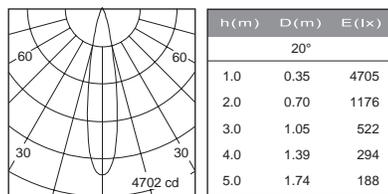


- Adjustable



Dimmable

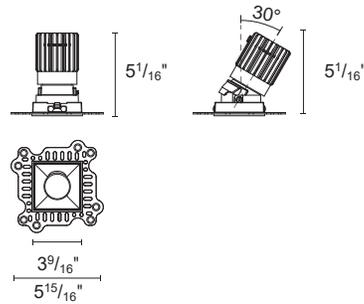


Cut out : 3^{30/32}" x 3^{30/32}"

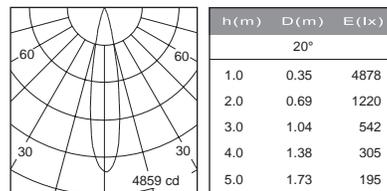


Housing Options

- New construction plate



- IC Box



Due to continuous improvements, the information herein may be changed without notice